




# WR-06 Antenna Test & Measurement Frequency Extension System 110-170 GHz: AET/AER-06-0001/2

**Farran's AET-06-0001 and AER-06-0001/2 frequency extenders are a dedicated Test & Measurement solution for antenna performance verification in WR-06 (110 – 170 GHz).**

The system comprises of the transmitter (AET) and receiver (AER) units that enable antenna radiation pattern, gain and phase polarisation measurements in the near- and far-field.

## Key Facts:

- Dynamic range > 120 dB.
- Exceptional amplitude and phase stability:  $\pm 0.2$  dB /  $\pm 4$  deg.
- Frequency coverage 110 - 170 GHz.
- Precision waveguide test port WR-06 IEEE 1785.2a (UG-387/UM compatible).
- Lightweight: 1.8 kg (AET) and 1.4 kg (AER).

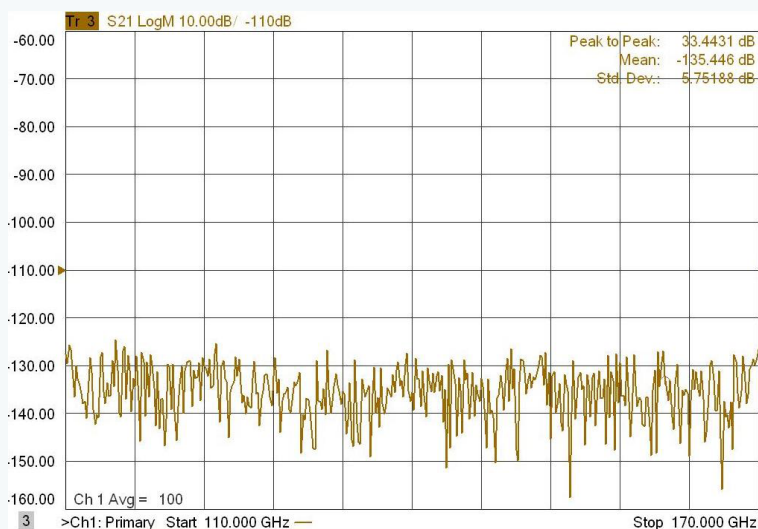

We required simple and easy-to-use frequency extension systems that enable coherent phase and amplitude measurements. We also required a very high dynamic range and full waveguide bandwidth coverage. All these features, together with high stability and small form factor, make Farran's AET/AER modules a perfect solution for our antenna range measurements.

**Senior Antenna Test Engineer, Space Research and Technology Centre**

Clarke & Severn Electronics  
Ph +612 9482 1944  
Email [sales@clarke.com.au](mailto:sales@clarke.com.au)  
[www.clarke.com.au](http://www.clarke.com.au)  
webshop: [www.cseonline.com.au](http://www.cseonline.com.au)



## RADIATION PATTERN MEASUREMENTS

- Lightweight and compact - ideal for omni-directional spherical systems and scanners.
- High measurement speed.



## GAIN, PHASE AND POLARISATION MEASUREMENTS

- Coherent phase and amplitude measurements.
- High phase and amplitude stability.
- Very high dynamic range.



## NEAR- AND FAR-FIELD MEASUREMENTS

- Spherical near- and far-field measurements.
- Far-field measurements of low gain antennas.



## Product Specification

System Specification	Unit	Min	Typ	Max
Operating Frequency	GHz	110	-	170
Dynamic Range (AER-06-0001)	dB	100	120	-
Dynamic Range (AER-06-0002)	dB	120	135	-
Test Port Output Power (n. trc. meas.)	dBm	-	-10	-
Magnitude Trace Stability (typ.)	dB	-	±0.2	-
Phase Trace Stability (typ.)	deg	-	±4	-
RF/LO Port Damage Level (nom.)	dBm	+15	-	-
RF Input Frequency	GHz	9.16	-	14.17
RF Multiplier Number (nom.)	-	-	12	-
RF/LO Power Input	dBm	5	-	10
LO Input Frequency	GHz	9.16	-	14.17
LO Harmonic Number (nom.)	-	-	12	-
RF Test Port (nom.)	-	WR-06, IEEE 1785.2a (UG-387/UM compatible)		
RF Test Port VSWR (typ.)	-	-	<1.4:1	-
RF Input VSWR (typ.)	-	-	<1.4:1	-
IF Bandwidth (nom.)	MHz	5	-	1000
RF/LO/IF Ports	-	SMA(F)		
DC Power Requirements (typ.)	-	+12V @ 1.5A		
Dimensions (approx.) AET	mm	230 x 105 x 60		
Dimensions (approx.) AER	mm	170 x 105 x 60		
Weight (approx.) AET	kg	1.8		
Weight (approx.) AER	kg	1.4		
Operating Temperatures (nom.)	°C	0	-	30



### SERVICES AVAILABLE

- Technical Support
- Installation and Setup
- Maintenance
- Application Support
- Hardware Support

For more information on any of our products or services please visit our website: [www.farran.com](http://www.farran.com)



### TECHNICAL SUPPORT

- Technical support provided directly by our knowledgeable and friendly engineers.
- Support for pre- and post-purchase: system configuration, installation and troubleshooting.



### PRODUCT INSIGHTS

- For more product insights register at [www.farran.com/customer](http://www.farran.com/customer)
- Additional information: test data, CAD drawings and 3D models available.



### WARRANTY

- Standard 3 year warranty.
- Up to 5 year warranty optional.

### Specification Definitions

**Nominal value (nom.)** – ensured by design, not tested. **Measured value (min, max)** – expected and warranted product performance obtained from the actual measurements of product sample. **Non-traceable measured value (n. trc. meas.)** – expected product performance obtained from the actual measurements of a product sample by means of using Farran's own equipment and methods. Traceable only to Farran laboratory equipment. **Typical data (typ.)** – value that represents the product specification met over 90% of bandwidth or a mean value. **Specifications without limits** – represent the warranted product performance; with values of no or a negligible deviation from the given value and as such have a secondary impact on the product performance.

